

# General Spec Sheet:

## 18" (457mm) Round Vent

The 18" (457mm) Round Vent is a functional and decorative vent designed to provide unforced free airflow ventilation of attics or similar spaces when used in conjunction with proper soffit ventilation practices. Local ventilation codes apply when installing this unit.

### FEATURES:

- Easy to install on all types of exteriors
- Single unit body construction of vent housing
- J-Channel eliminated
- Double baffles for increased weather resistance
- Fully screened for complete insect protection
- Finish trim ring adjusts for a range of siding thickness

### SPECIFICATIONS:

Material:	Vent	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Ring	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Baffle	Black PP; .025" (.635mm) wall
	Screen	Fiberglass; 18" x 16" (457mm x 406mm) mesh
		Paintable/Stainable HIPS available

Fabrication:	Single piece moulded unit
	Baffle and screen sealed to interior side of unit
	Trim ring single piece moulded unit

Attachment:	Screw or nail directly to any surface
-------------	---------------------------------------

Packaging:	1 assembly per box
------------	--------------------


Vent Free Area:	26 sq. in. (16774 sq. mm)
-----------------	---------------------------

Rough Opening:	5" x 6" (127mm x 152mm)
----------------	-------------------------

U.S. Patent No:	4,875,318; 5,349,799
-----------------	----------------------

Can. Patent No:	1,280,024
-----------------	-----------

### Dimensions:

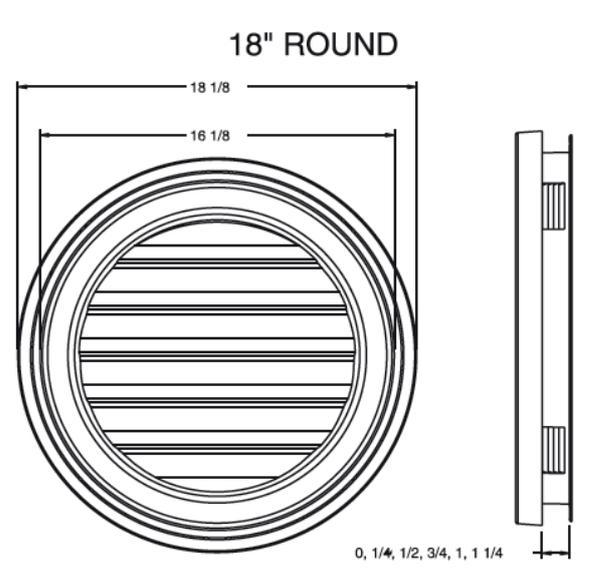

# General Spec Sheet:

## 22" (559mm) Round Vent


The 22" (559mm) Round Vent is a functional and decorative vent designed to provide unforced free airflow ventilation of attics or similar spaces when used in conjunction with proper soffit ventilation practices. Local ventilation codes apply when installing this unit.

### FEATURES:

- Easy to install on all types of exteriors
- Single unit body construction of vent housing
- J-Channel eliminated
- Double baffles for increased weather resistance
- Fully screened for complete insect protection
- Finish trim ring adjusts for a range of siding thickness

### SPECIFICATIONS:

Material:	Vent	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Ring	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Baffle	Black PP; .025" (.635mm) wall
	Screen	18" x 16" (457mm x 406mm) mesh
		Paintable/Stainable HIPS available
Fabrication:		Single piece moulded unit
		Baffle and screen sealed to interior side of unit
		Trim ring single piece moulded unit
Attachment:		Screw or nail directly to any surface
Packaging:		1 assembly per box
Vent Free Area:		50 sq. in. (32258 sq. mm)
Rough Opening:		16" x 16" (406mm x 406mm)
U.S. Patent No:		4,875,318; 5,349,799
Can. Patent No:		1,280,024
Dimensions:		



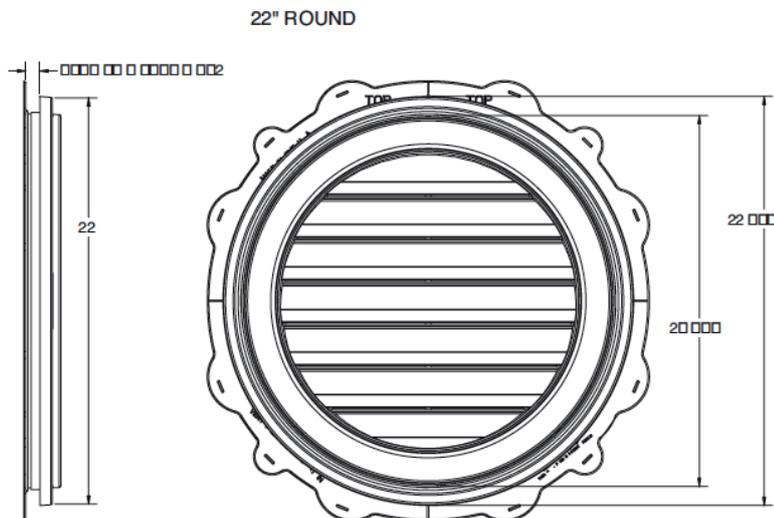


22" (559mm) Round

Net Free Area: 50 sq. in. (32258 sq. mm)




WALL OPENING: 16" X 16"

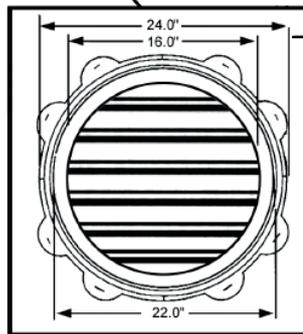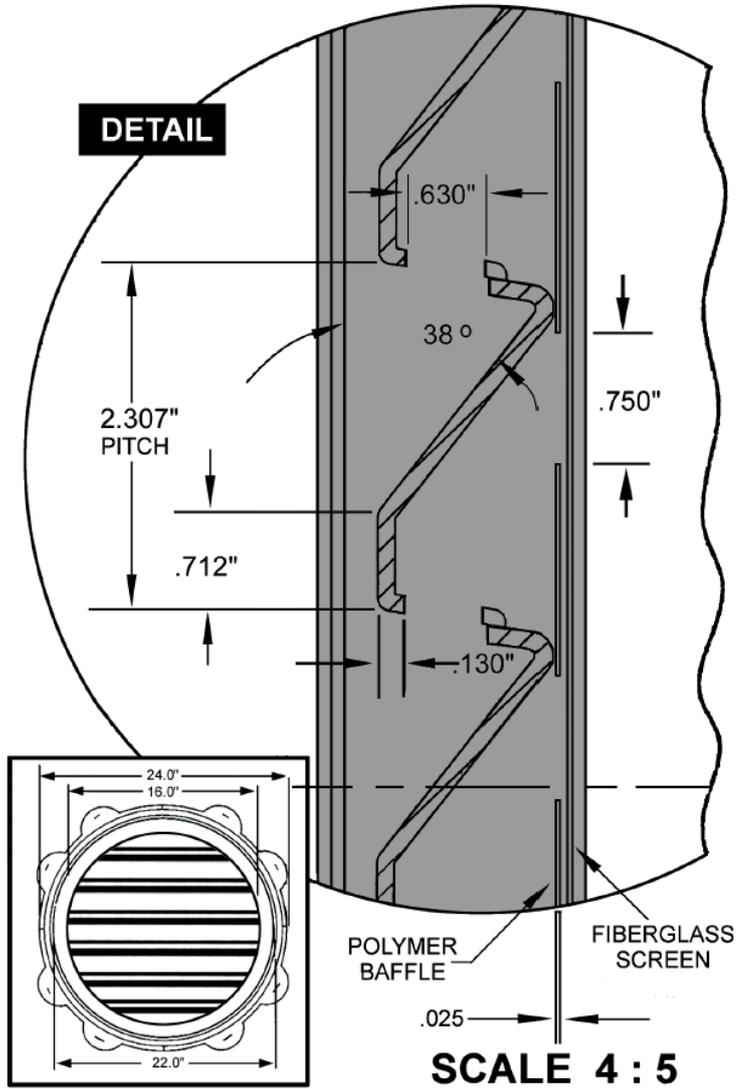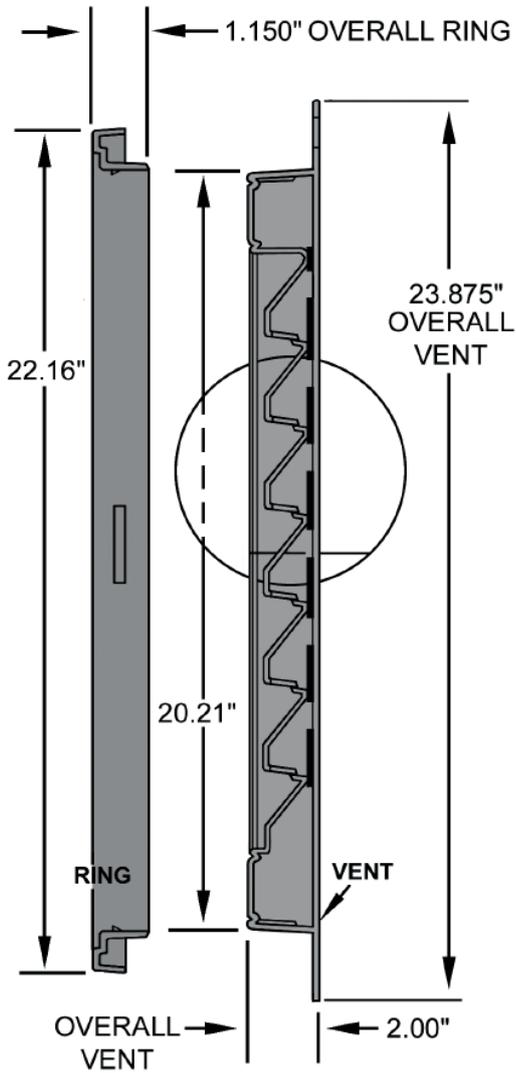

# 22" (559mm) Round

Net Free Area: 50 sq. in. (32258 sq. mm)

Note: Complete installation instructions are included with each product.

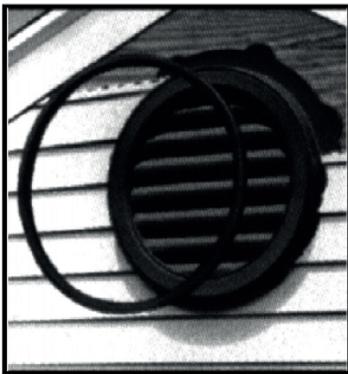


INSTALLING ROUND VENT



In most cases, the rough opening can be cut directly into the sheathing. However, if a non structural sheathing is used, such as an insulating foamboard, it is recommended that the opening be framed in.

EXAMPLE OF ROUGH OPENING

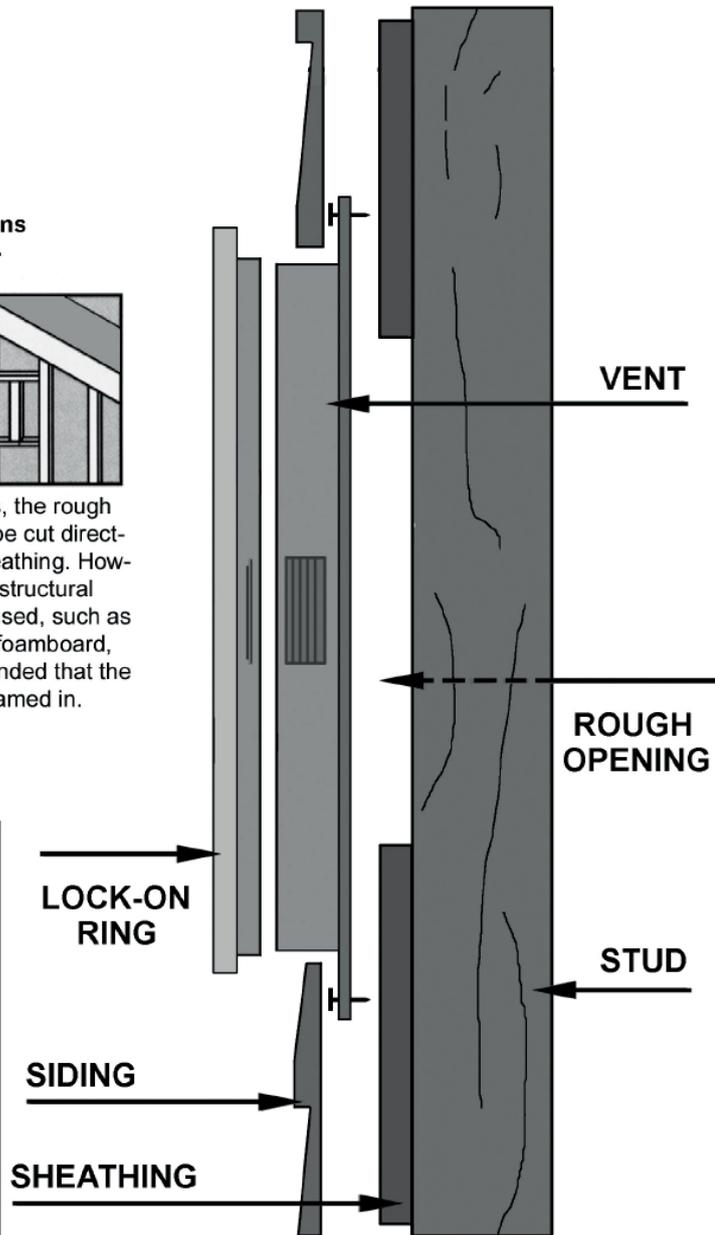

\* Rough opening refers to the minimum amount of unobstructed wall opening needed to maintain the Net Free Area.

# General Spec Sheet:

## 36" (914mm) Round Vent

The 36" (914mm) Round Vent is a functional and decorative vent designed to provide unforced free airflow ventilation of attics or similar spaces when used in conjunction with proper soffit ventilation practices. Local ventilation codes apply when installing this unit.


**FEATURES:**

- Easy to install on all types of exteriors
- Single unit body construction of vent housing
- J-Channel eliminated
- Double baffles for increased weather resistance
- Fully screened for complete insect protection
- Finish trim ring adjusts for a range of siding thickness

**SPECIFICATIONS:**

Material:	Vent	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Ring	UV stabilized copolymer; colour moulded in; .100" (2.54mm) nominal wall
	Baffle	Black PP; .025" (.635mm) wall
	Screen	Fiberglass; 18" x 16" (457mm x 406mm) mesh
		Paintable/Stainable HIPS available
Fabrication:	Single piece moulded unit	
	Baffle and screen sealed to interior side of unit	
	Trim ring single piece moulded unit	
Attachment:	Screw or nail directly to any surface	
Packaging:	1 assembly per box	
Vent Free Area:		
Rough Opening:		
U.S. Patent No:	4,875,318; 5,349,799	
Can. Patent No:	1,280,024	
Dimensions:		

36" ROUND

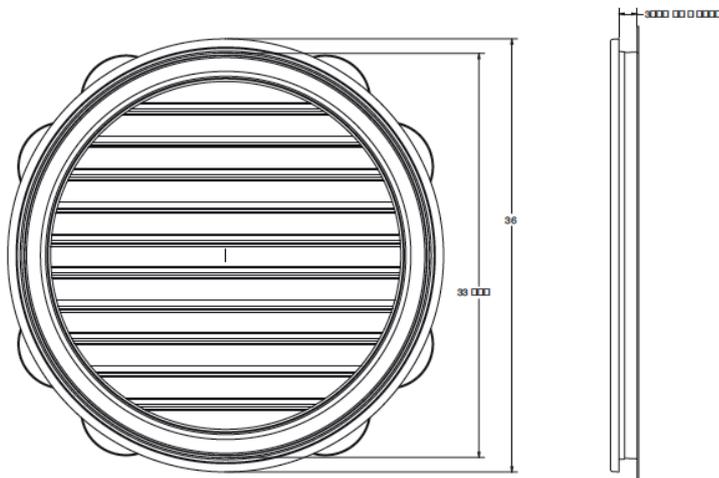

# 36" (914mm) Round

Net Free Area: 140 sq. in. (90322 sq. mm)

