

TITANIUM[®] UDL 25


SYNTHETIC ROOFING UNDERLAYMENT

**FOR USE UNDER:
METAL, SHAKE & SHINGLE ROOFING**

- Up to 6 months UV exposure rating
- Meets and exceeds ASTM D226 Types I & II
- ICC ES Approved
- Class A Fire ASTM E108
- CAN/CSA A220.1
- Meets Class 4 Hail Rating
- Florida Building Code Approved
- Texas Department of Insurance
- 11 times lighter & 14 times stronger than 30 lb felt
- Contributes to LEED® points, 100% Recyclable
- All temperature performance -40°F to 240°F
- Synthetic construction inert to mold growth
- Cool gray surface, doesn't expand or contract
- Dual logo custom printing available

SPECIFICATIONS

LENGTH PER ROLL:	250' / 76.2 m
WIDTH PER ROLL:	48" / 122 cm
WEIGHT PER ROLL:	25 lbs / 11.5 kg
ROLL SIZE:	10 sq / 93 m ²
ROLLS PER PALLET:	56
PALLET WEIGHT:	1,450 lbs / 658 kg

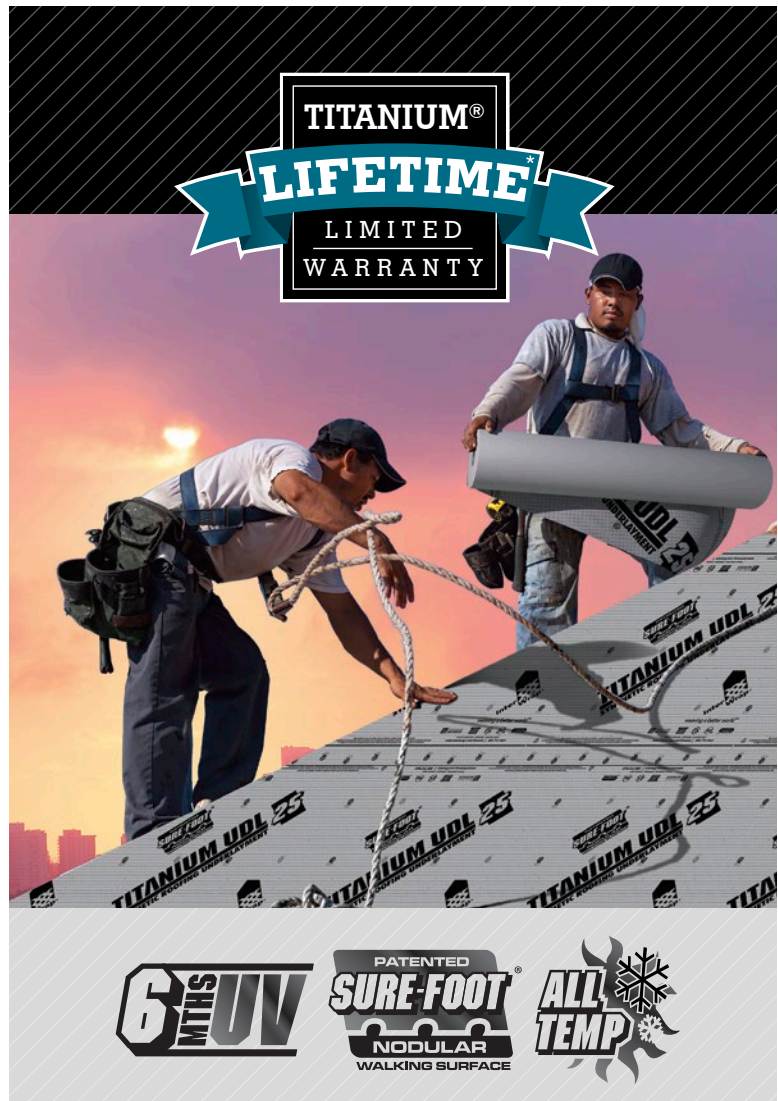

TITANIUM[®]
LIFETIME[™]
LIMITED
WARRANTY

6 MONTHS UV

PATENTED SURE-FOOT[®]
NODULAR WALKING SURFACE

ALL TEMP

MIAMI-DADE COUNTY APPROVED

ICC ES

Intertek

ETL Intertek

SCS certified
MINIMUM 20% RECYCLED CONTENT
PRE-CONSUMER

*See www.InterWrap.com/LifetimeWarranty for complete coverage and restrictions

TEST & STANDARD	UDL25 TYPICAL VALUE	ASTM #30 FELT TYPICAL VALUE
Class A Fire ASTM E108	Pass	N/A
Nail Sealability ASTM D1970	Pass	N/A
Permeability ASTM E96	.06 perms	1.75 perms
Water Transmission ASTM D4869	Pass	Pass
Tear Strength ASTM D4533	MD 31 lbs (14 kg) CD 27 lbs (12.5 kg)	MD 4 lbs (1.8 kg) CD 2 lbs (0.9 kg)
Tensile Strength ASTM D751	MD 135 lbs (61 kg) CD 100 lbs (45.5 kg)	MD 70 lbs (32 kg) CD 38 lbs (17 kg)
Burst Strength ASTM D751	220 psi (1517 kPa)	62 psi (430 kPa)
Elongation ASTM D751	MD 17% CD 20%	MD 2% CD 2%
Weight per Square ASTM D5261	2.4 lbs (1.1 kgs)	27.5 lbs (12.5 kgs)
Minimum Thickness ASTM D1777	15 mils (0.38 mm)	60 mils (1.5 mm)
Temperature Range	-40°F to 240°F (-40°C to 115°C)	



1-800-453-0349



This product is manufactured in accordance with national standards which allow for non-critical variances in weights and measures.
Test data is based on average taken over several production runs and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications.
All values ± 10%. UDL25_SS_21April2015