

RIDGE SEAL™

SELF-ADHERING HIP & RIDGE TAPE


MFM Building Products Corp. manufactures a wide range of innovative waterproofing products for the building industry. With more than 55 years of field experience, MFM products are engineered for superior performance and ease of installation.

DESCRIPTION

RidgeSeal™ has a gray polymer surface which is durable, puncture resistant, extremely pliable, and resistant to ultraviolet exposure. RidgeSeal is a self-adhering waterproof membrane which is easy to apply to irregular surfaces. The top layer is a tough, UV-resistant, waterproof polymer film, which is laminated to a layer of modified asphalt adhesive. The adhesive material adheres to the roof surface and seals around nails protecting against costly water damage. A high-quality release liner is used to protect the adhesive surface and is removed when RidgeSeal is installed.

INSTALLATION

- Apply at ambient temperatures above 50°F
- The surface must be clean, smooth, and dry
- Use a wire brush and asphalt-based primer or MFM Spray Adhesive™ as necessary to obtain proper surface conditions
- Carefully unroll membrane, removing release liner and pressing material into place as you go
- For best adhesion, roll the entire surface with a hand roller, focusing particular attention on seams and edges
- Repeat next section allowing 6" laps at the ends and 3" laps at the sides (if using multiple sections, install shingle style to prevent leaks)
- RidgeSeal should be covered by roofing tiles or shingles as soon as possible, but may be left exposed for up to 180 days

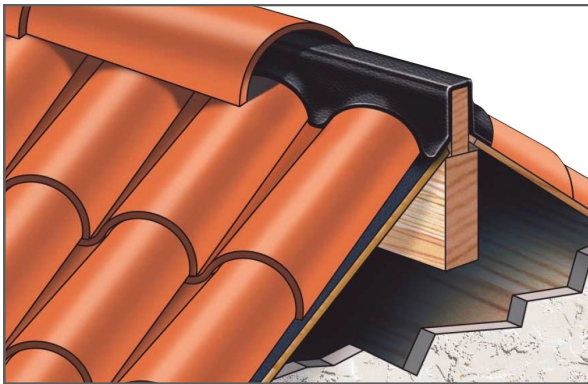

WARNINGS

- Product can be very slick – avoid standing, kneeling or walking on the surface because of the danger of falling
- The adhesive is not compatible with EPDM rubber – never apply over a EPDM rubber surface
- The adhesive properties may be damaged by sun exposure
- Remove from the carton only as needed for installation
- Store in original carton in a cool, dry environment
- Installer is responsible for compatibility with caulks and sealants

PRODUCT DATA

Installation Temperature Range	>50°F
Material Color	Gray
Roll Width	9", 12"
Roll Length	50 ft
Carton Weight	39 lbs
Rolls per Carton	4, 3
Area per Carton	150 ft ²
Cartons per Pallet	30

TECHNICAL SPECIFICATIONS

Property	Test Method	Result
Material Thickness	ASTM D 3767	35 Mils Nom.
Pliability	ASTM D 1970	Pass
Nail Sealability	ASTM D 1970	Pass
Tensile Gray	ASTM D 1970	4.3 lbf/in

PRODUCT NUMBERS | PRODUCT UPC CODES

12" - 45G12	7 25799 10014 3
9" - 45G09	7 25799 10013 6

5-YEAR LIMITED WARRANTY

MFM Building Products Corp. (MFM) warrants materials to be free from leaks caused by defects in material or manufacturing for a period of five (5) years from the date of purchase when applied according to published directions.

For the most current Installation Instructions, Warranties, Technical Specifications and Approvals, visit www.mfmbp.com.

